


# IMER IM 7380V

## Dimensions

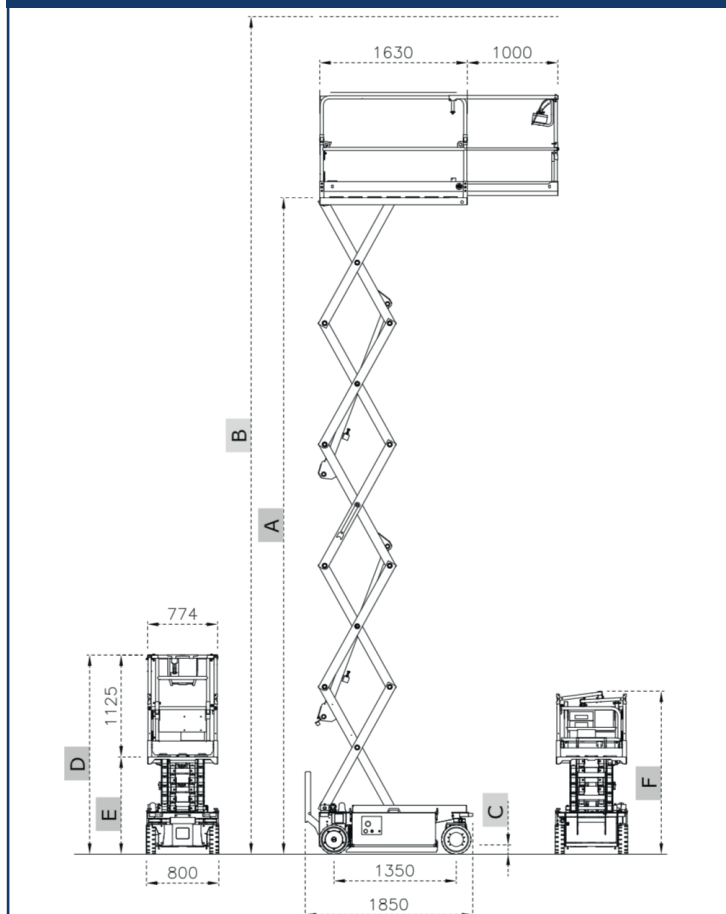

## Specifications

INDOOR USE

**IM 7380**

Number of scissors		5
A (platform height)	m	7,2
B (working height)	m	9,2
C (ground clearance: pot hole up/down)	mm	90 / 22
D (stowed height)	m	2,20
E (min. platform height)	m	1,08
F (height with folded guards)	m	1,8
Capacity	kg	200
Capacity on deck extension	kg	200
Allowed operators	n°	2
Traction motors	V/kW	24 / 2,4
Powerpack	V/kW	24 / 2,1
Batteries	V/Ah	24 / 185 (C5)
Battery weight	kg	4 x 28
Battery charger	V/A	24 / 20
Oil tank capacity	l	7
Max driving speed	km/h	4
Safety speed	km/h	0,6
Gradeability	%	25
Internal turning radius	m	0
External turning radius	m	1,7
Tires dimensions	mm	325 x 100
Tires type		cushion
Allowed max. inclination	degrees	1,5 / 2,5
Weight	kg	1700

## Standard equipment

- Electric traction on the front wheels
- Negative electromagnetic parking brakes with electric disengagement
- 90° wheel steering
- Manual deck extension 1.0 m
- Manual emergency lowering
- Non-return valve on lifting cylinders
- Traction batteries 24V-185Ah (c5)
- Battery charger with automatic cut-off
- All movement alarm, horn, hour meter
- Inclinometer with motion cut-out and alarm
- Mechanical release for emergency hauling
- Solid rubber non-marking tires
- Electric scissor protection
- Pot Hole protection
- Battery level control with low voltage protection
- Foldable guardrails
- Overload sensor
- CE - EN 280
- Prearranged cable for 230V outlet on platform
- Flashin beacon
- Proportional controls with diagnostics