


LGMG AS 0808

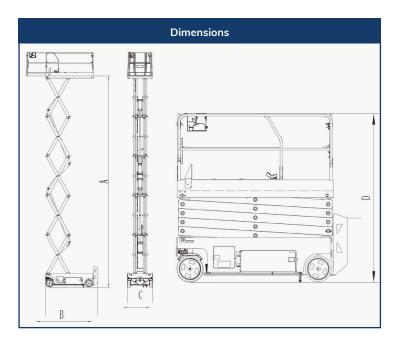

		Specifications
Lift Capacity	230kg	Proportional control
Lift Capacity Extension	113kg	Foldable guardrail
Ent Supulity Extension		Lanyard point
Max. Platform Occupants	2	Emergency stop device
Max. Working Height(A+2)	10m	Two-wheel brake
		Manual brake release
Overall Length(B)	2.47m	Emergency descent
Overall Width(C)	0.83m	Swing-out component tray
Overall Height-Rails Folded(D)	1.96m	Pothole guards
Overall Fleight-Nails Folded(D)	1.50111	Tilt alarm
Platform Extension Length	0.9m	Descent alarm
Driving Speed(stowed/raised)	3.5km/h	Descent protection
Up/Down Speed-GB 0	0.8km/h	Horn/ Hour meter
		Full-height drive
Up/Down Speed-CE	31/40sec	Overload alarm
Gradeability	25%	Charging operation limit
Max. Slope	1.5°/3°	Flashing beacon/Buzzer
		4x2 drive
Machine Weigh	2180kg	Intelligent diagnostic system