


## **LGMG AS 1212**

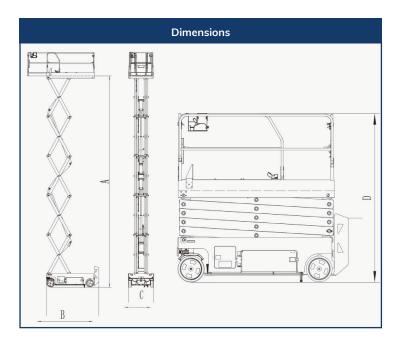

		Specifications
Lift Capacity	320kg	Proportional control
Lift Capacity Extension	113kg	Foldable guardrail
		Lanyard point
Max. Platform Occupants	2	Emergency stop device
Max. Working Height(A+2)	14m	Two-wheel brake
Overall Length(B)	2.47m	Manual brake release
		Emergency descent
Overall Width(C)	1.18m	Swing-out component tray
Overall Height-Rails Folded(D)	1.96m	Pothole guards
Overall Fleight Rails Folded(D)	1.00111	Tilt alarm
Platform Extension Length	0.9m	Descent alarm
Driving Speed(stowed/raised)	3.1km/h	Descent protection
Up/Down Speed-GB 0.8kr	0.9km/h	Horn/ Hour meter
	U.OKIII/II	Full-height drive
Up/Down Speed-CE	53/90sec	Overload alarm
Gradeability	25%	Charging operation limit
Max. Slope	1.5°/3°	Flashing beacon/Buzzer
		4x2 drive
Machine Weigh	3300kg	Intelligent diagnostic system