


JCB 426e

Dimensions

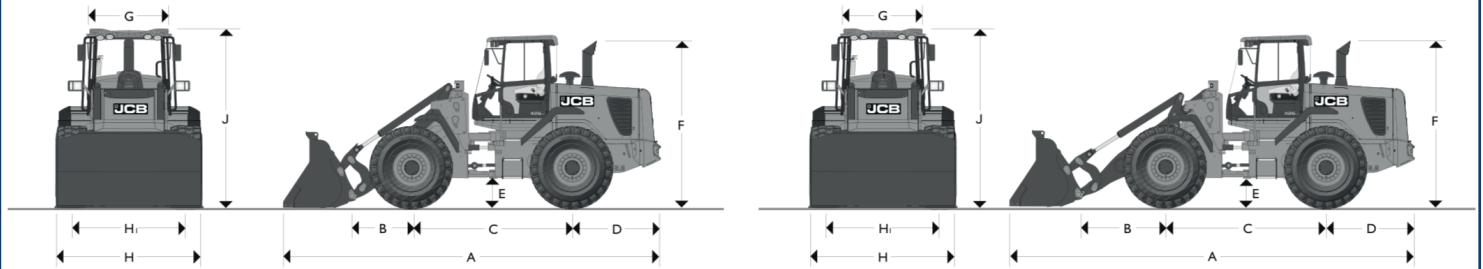

426/426e HT – STATIC DIMENSIONS – Standard height arm


		mm (ft-in)
A	Overall length with standard bucket	6831 (22-5)
B	Axle to pivot pin	1096 (3-7)
C	Wheel Base	3000 (9-8)
D	Axle to counterweight face	1816 (5-11)
E	Minimum ground clearance	442 (1-5)
F	Height over exhaust	3192 (10-6)
G	Width over cab	1400 (4-7)
H	Width over tyres	2482 (8-2)
Hi	Wheel track	1955 (6-5)
J	Height over cab	3335 (10-11)
	Pin height (maximum)	3906 (12-10)
	Overall operating height	5095 (16-9)
	Front axle weight	kg (lb) 5574 (12289)
	Rear axle weight	kg (lb) 7126 (15710)
	Total weight	kg (lb) 12700 (27999)
	Inside radius	2920 (9-7)
	Maximum radius	5790 (19-0)
	Articulation angle	degrees ± 40°

Data based on machine equipped with pin mounted 1.9m³ bucket with bolt-on toeplates and 20.5R25 XHA (L3) tyres.

426/426e HT – STATIC DIMENSIONS – High lift arm

		mm (ft-in)
A	Overall length with standard bucket	7244 (23-9)
B	Axle to pivot pin	1509 (3-7)
C	Wheel Base	3000 (9-8)
D	Axle to counterweight face	1816 (5-11)
E	Minimum ground clearance	442 (1-5)
F	Height over exhaust	3192 (10-6)
G	Width over cab	1400 (4-7)
H	Width over tyres	2482 (8-2)
Hi	Wheel track	2070 (6-9)
J	Height over cab	3335 (10-11)
	Pin height (maximum)	4336 (14-3)
	Overall operating height	5525 (18-2)
	Front axle weight	kg (lb) 5869 (12939)
	Rear axle weight	kg (lb) 7101 (15655)
	Total weight	kg (lb) 12970 (28594)
	Inside radius	2825 (9-3)
	Maximum radius over shovel	5985 (19-6)
	Articulation angle	degrees ± 40°

Data based on machine equipped with pin mounted 1.9m³ bucket with bolt-on toeplates and 20.5R25 XHA (L3) tyres.

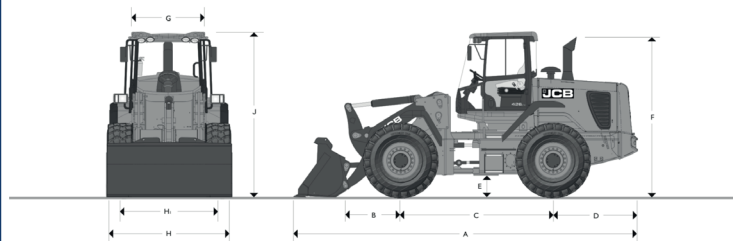

426/426e ZX – STATIC DIMENSIONS

		mm (ft-in)
A	Overall length with standard bucket	6831 (22-5)
B	Axle to pivot pin	1096 (3-7)
C	Wheel Base	3000 (9-8)
D	Axle to tow hitch	1816 (5-11)
E	Minimum ground clearance	442 (1-5)
F	Height over exhaust	3192 (10-6)
G	Width over cab	1400 (4-7)
H	Width over tyres	2482 (8-2)
Hi	Wheel track	1955 (6-5)
J	Height over cab	3335 (10-11)

Data based on machine equipped with pin mounted 1.9m³ bucket with bolt-on toeplates and 20.5R25 XHA (L3) tyres.

		mm (ft-in)
	Pin height (maximum)	3906 (12-10)
	Overall operating height	5095 (16-9)
	Front axle weight	kg (lb) 5830 (12853)
	Rear axle weight	kg (lb) 7020 (15476)
	Total weight	kg (lb) 12850 (28329)
	Inside radius	2920 (9-7)
	Maximum radius over shovel	5790 (19-0)
	Articulation angle	degrees ± 40°

